



More freedom and flexibility when you cook

Experience kitchen planning freedom and flexibility with the 6000 Bridge with eXtractor Hob. This induction hob has a built-in extractor and bridge function allowing you to combine two cooking zones into one large zone for more versatility.

Product Benefits & Features

Combine 2 cooking zones with Bridge

The Bridge function combines two cooking zones together to fit any large or long pan. Sharing the same temperature and time setting, the linked zones are ideal when you're cooking for dinner parties or bigger celebrations.

- Child safety lock function
- Automatic safety switch off
- Indicator for grease filter saturation
- Indicator for carbon filter saturation



Get more from cooking with 4 Individual Zone Controls

4 Individual Zone Controls allow you to command 4 different cooking zones and set separate timers for each. Other functions include 9 power levels, power boost, active touch, child lock and hob2Hood control.

The Grease Filter is easy to remove and clean.

The Grease Filter helps to remove grease from your kitchen air. A Grease Filter is used when the appliance is installed in duct-out mode. The Grease Filter is easy to remove and can be washed in the dishwasher.



Automated extraction. With Hob2Hood®

Hob2Hood® technology allows for automated extraction during cooking. If you turn the temperature up or down on the hob, the extractor's fan will adjust itself accordingly. Meaning all your focus goes into your food.


Boost function. Cleans kitchen air quickly

When kitchen fumes or steam become too much, press the Boost function on the extractor for instant powerful extraction. Boost is activated for 10 min to efficiently clean the kitchen air.

Product Specification

Frame type	Bevelled 4 Sides No
Hobs Dimensions	780x520
Aperture dimensions HxWxD in mm	212x750x490
Air Outlet	220
Filter Type	Aluminium mesh
Grease filters	2
Radius cutting	5
Energy class	A+
Fluid dynamic efficiency class	A
Grease filter efficiency class	B
Motor Type	Brushless
Cord Length (m)	0
EAN number	7332543819461
Recirculation min, m3/h	250
Recirculation intensive, m3/h	575
Recirculation max, m3/h	465
Recirc sound power min, dB(A)	52
Recirc sound power max, dB(A)	67
ProdPartCode	E - Generic Partner All

PSGBHH220DE00008

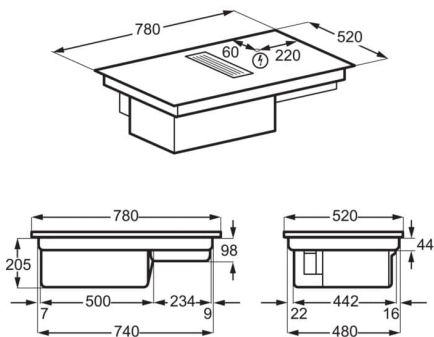

PSGBHH220DE0000A

