

Series 4, Telescopic cooker hood, 60 cm, Silver metallic DFS067A51B



Optional accessories

| | |
|-----------|--|
| DSZ4660 | Lowering frame |
| DSZ4682 | Handle strip white |
| DSZ4686 | Handle strip black |
| DWZ1IT1D1 | Long Life recirculation kit external |
| DWZ1IX1B6 | Clean Air Plus odor filter (replacement) |
| DWZ1IX1C6 | Clean Air Plus recirc. kit external |
| DWZ2IT1I4 | Clean Air Standard recirculation kit |

Telescopic cooker hoods extend when in use and slide neatly away when not in operation.

- **EcoSilence Drive™**: the powerful, energy-saving drive for hoods.
- **High extraction rate - for continuously clean air in the kitchen.**
- **Intensive Setting**: the powerful way to beat intense steam during cooking.
- **Enjoy the benefits of a cleaner kitchen, free from excessive grease and unwanted odors.**
- **LED Illumination**: The energy-saving lighting provides bright and clear lighting for the hob area.

Technical Data

| | |
|---|------------------------------------|
| Typology: | Pull-out |
| Length electrical supply cord: | 175 cm |
| Required niche size for installation (HxWxD): | ... 385mm x 524.0mm x 290mm mm |
| Height of the appliance: | 426 mm |
| Minimum distance above an electric hob: | 430 mm |
| Minimum distance above a gas hob: |650 mm |
| Net weight: | 10.6 kg |
| Type of control: |Electronic |
| Number of speed settings: | 3-stages + intensive setting |
| Max. air extraction: | 399 m ³ /h |
| Boost position output recirculating: | 628 m ³ /h |
| Max. air recirculation: | 358 m ³ /h |
| Boost position air extraction: | 728 m ³ /h |
| Maximum Air flow: |399 m ³ /h |
| Number of lights: | 2 |
| Noise level: |53 dB(A) re 1pW |
| Diameter of air outlet: | 120 / 150 mm |
| Grease filter material: | Washable stainless steel |
| EAN code: | 4242005232062 |
| Connection rating: | 144 W |
| Fuse protection: | 10 A |
| Voltage: | 220-240 V |
| Frequency: | 50; 60 Hz |
| Plug type: | GB plug |
| Installation typology: | Built-in |



Series 4, Telescopic cooker hood, 60 cm, Silver metallic DFS067A51B

Telescopic cooker hoods extend when in use and slide neatly away when not in operation.

- Installation: Cupboard 60 cm
- Dimensions (HxWxD): 426 x 598 x 290 mm
- Built-in dimensions (HxWxD): 385 x 524 x 290 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.75 m

* In accordance with the EU-Regulation No 65/2014

Features

- Electronic control via Soft touch button control
- 3 power levels & intensive setting
- 2 x 1,5W LED
- Efficient BLDC technology
- Automatic intensive revert (6mins)
- Automatic after running (Automatic after running (10 min))
- 2 removable metal grease filter cassettes

Design

- 60 cm wide
- Silver metallic lacquer
- Handle strip specification: stainless steel with logo
- Steel filter cover


Performance

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 max. 728 m³/h
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 399m³/h
 - Intensive 728 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 53 dB(A) re 1 pW
- Extraction rate exhaust air according to EN 61591:
 - max. normal use 399 m³/h, intensive 728 m³/h
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
 - Extraction rate in recirculation mode:
 - Max. normal use: 358m³/h
 - Intensive: 628m³/h
 - Noise level in recirculation mode:
 - Max. normal use: 60dB(A) re 1 pW
 - Intensive: 71 dB(A) re 1 pW
- 2 single inlet vertical, Efficient BLDC technology
- Colour Temperature: 3500 K
- Light Intensity: 294 lux
- Power rating: 144 W
- Average Energy Consumption: 37.9 kWh/year*
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*

Planning and installation information


- Installation system: Telescopic comfort installat.

**Series 4, Telescopic cooker hood, 60 cm, Silver metallic
DFS067A51B**

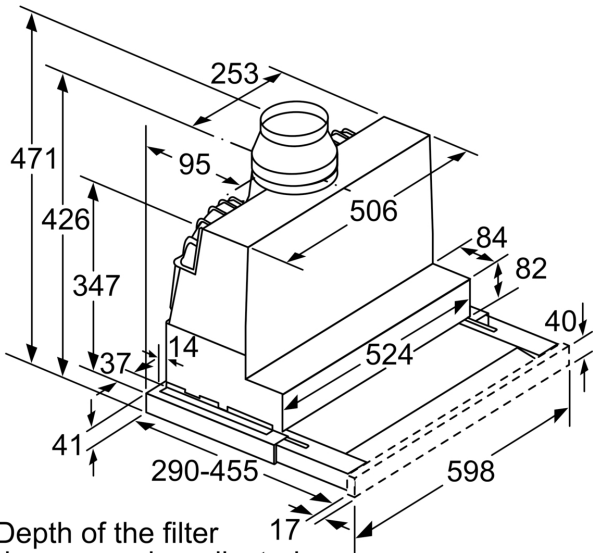


Depth of the filter drawer can be adjusted by up to 29 mm


measurements in mm

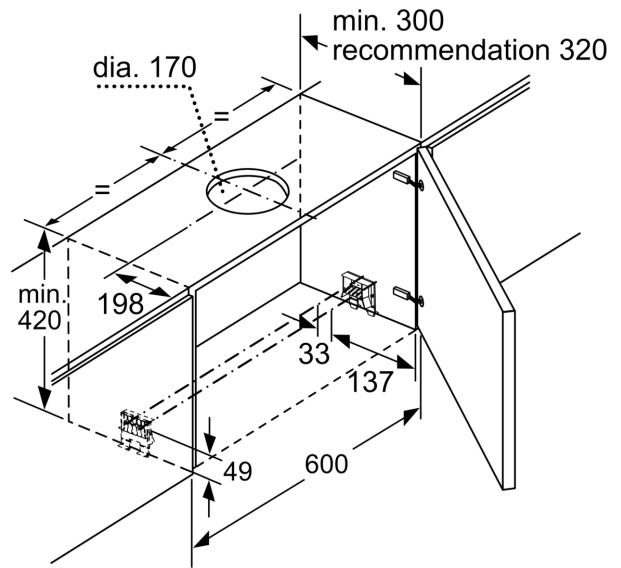




measurements in mm

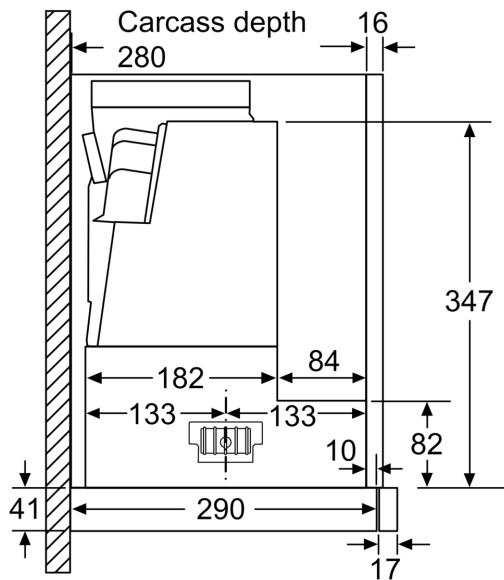

measurements in mm

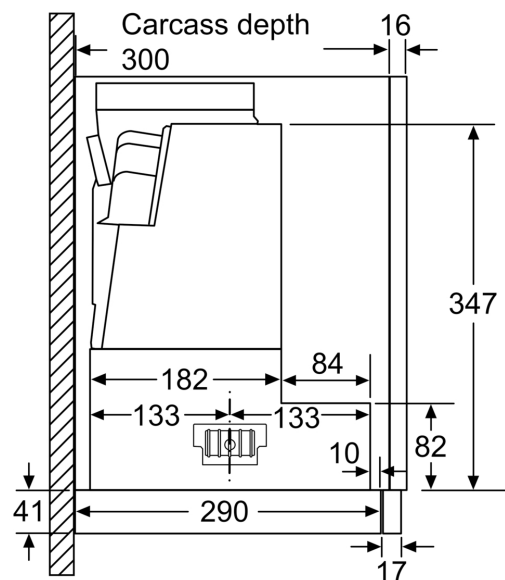

measurements in mm

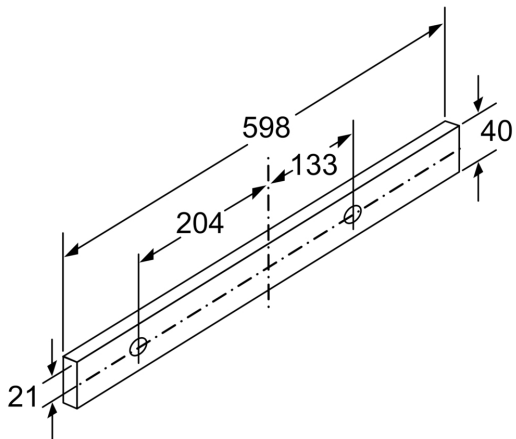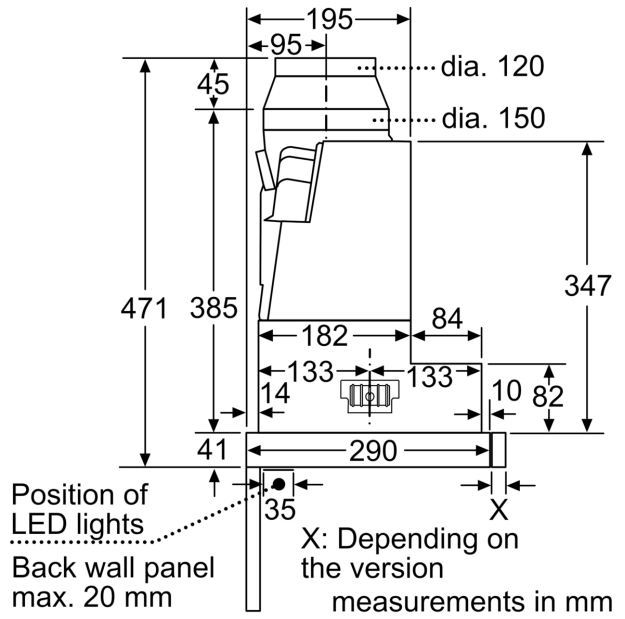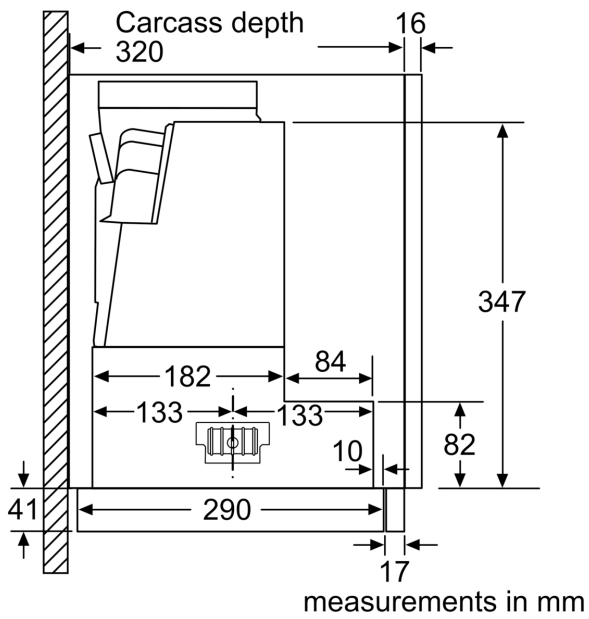

measurements in mm