

**Series 2, Wall-mounted cooker hood,
90 cm, clear glass, Stainless steel
DWG94BC50B**



Optional accessories

| | |
|-----------|--|
| DHZ1225 | Chimney extension 1000 mm |
| DHZ1235 | Chimney extension 1500 mm |
| DHZ9551 | Brushed steel back panel |
| DWZ0XX0J0 | Long Life recirculation kit |
| DWZ1DX114 | Clean Air Standard recirculation kit |
| DWZ1DX116 | Clean Air Plus recirculation kit |
| DWZ1FX5C6 | Clean Air Plus recirc. kit external |
| DWZ1FX5D1 | Long Life recirculation kit external |
| DZZ1XX1B6 | Clean Air Plus odor filter (replacement) |

**Hood with glass design: performance
combined with straight glass design
matching your kitchen.**

- **Quiet extraction with powerful performance**
- **LED Illumination:** The energy-saving lighting provides bright and clear lighting for the hob area.
- **High extraction rate - for continuously clean air in the kitchen.**
- **Dishwasher safe metal grease filter**
- **3 Power Levels:** Adjust the extraction intensity according to your cooking needs.

Technical Data

| | |
|---|-----------------------|
| Color chimney: | Stainless steel |
| Typology: | Wall-mounted |
| Length electrical supply cord: | 130 cm |
| Height of the chimney: | 576-906/576-998 mm |
| Height of the appliance: | 59 mm |
| Minimum distance above an electric hob: | 550 mm |
| Minimum distance above a gas hob: | 650 mm |
| Net weight: | 15.2 kg |
| Type of control: | Mechanical |
| Number of speed settings: | 3 |
| Max. air extraction: | 365 m ³ /h |
| Max. air recirculation: | 240 m ³ /h |
| Maximum Air flow: | 365 m ³ /h |
| Number of lights: | 2 |
| Noise level: | 64 dB(A) re 1pW |
| Diameter of air outlet: | 120 / 150 mm |
| Grease filter material: | Washable aluminium |
| EAN code: | 4242005051175 |
| Connection rating: | 100 W |
| Fuse protection: | 10 A |
| Voltage: | 220-240 V |
| Frequency: | 50; 60 Hz |
| Plug type: | GB plug |
| Installation typology: | Wall-mounted |



Series 2, Wall-mounted cooker hood, 90 cm, clear glass, Stainless steel DWG94BC50B

* In accordance with the EU-Regulation No 65/2014

**Hood with glass design: performance
combined with straight glass design
matching your kitchen.**

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 365 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 64 dB dB*

Features

- Push button control
- 3 power levels
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- 2 removable metal grease filter cassettes
- Installation: wall

Design

- Chimney extractor hood
- Mechanical


Performance/technical information

- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Maximum extraction rate exhaust air 365 m³/h according to EN 61591
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 64 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
- Extraction rate in recirculation mode:
 - Max. normal use: 240m³/h
- Noise level in recirculation mode:
 - Max. normal use: 65 dB(A) re 1 pW
- Power rating: 100 W
- Light Intensity: 91 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 525 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 525 mm
- Dimensions recirculating with CleanAir module (HxWxD):
 - 703 x 900 x 525mm - mounting with outer chimney
 - 833-1163 x 900 x 525 mm - mounting with telescopic chimney
- Blower Efficiency Class: E*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 53.1 kWh/year*

Optional accessories


- Recirculating kit DHZ1225

**Series 2, Wall-mounted cooker hood,
90 cm, clear glass, Stainless steel
DWG94BC50B**

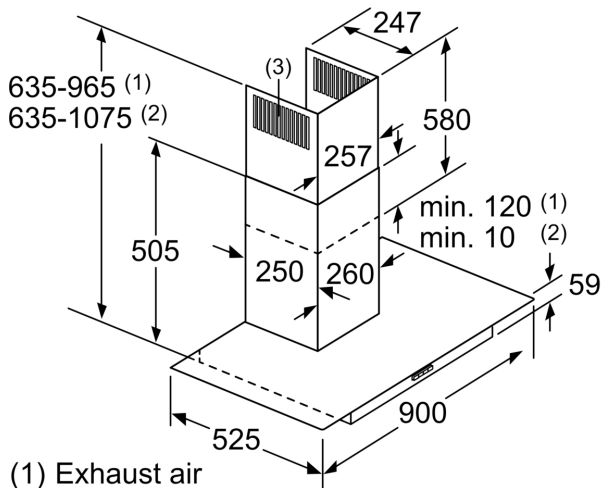


- (1) Exhaust air
- (2) Circulated air
- (3) Air outlet – slots for exhaust air to be mounted facing down

measurements in mm

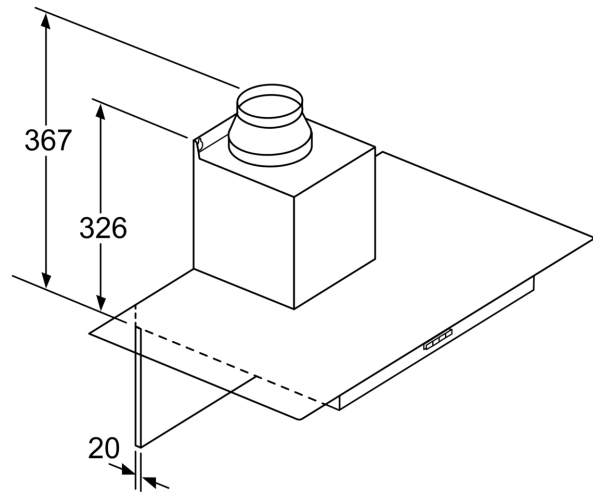

If a back panel is used, the design of the appliance must be considered.


measurements in mm

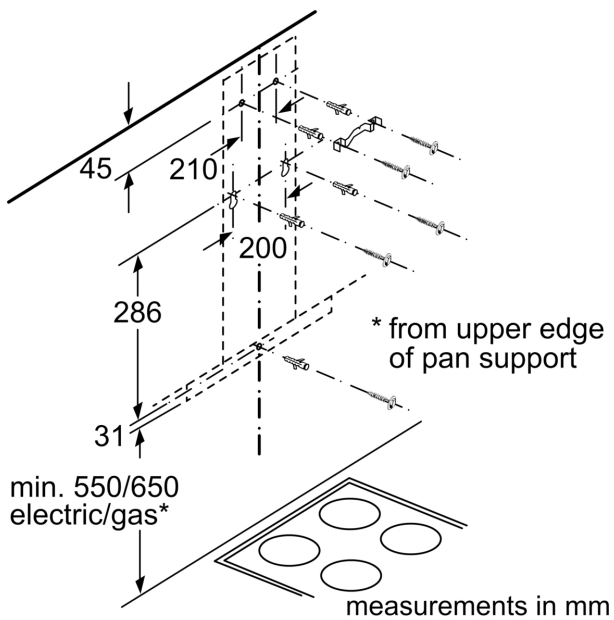

* from upper edge of pan support

min. 550/650 electric/gas*

measurements in mm

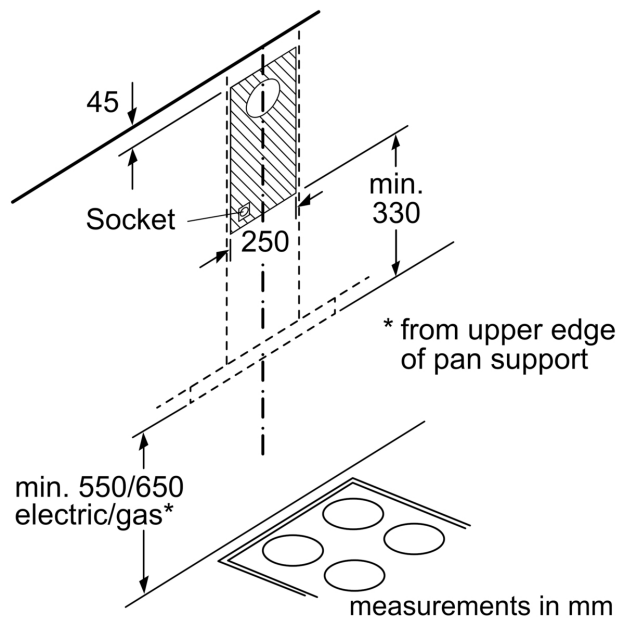

* from upper edge of pan support

min. 550/650 electric/gas*

measurements in mm