


**Series 6, Gas hob, 90 cm, Stainless steel
PCR9A5I90**

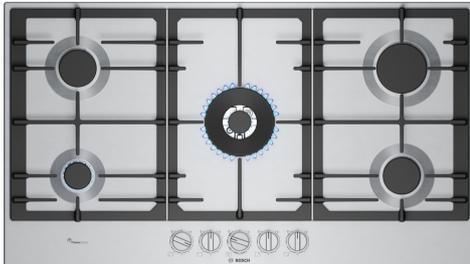

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

- **Flame Select:** Enjoy precise control of the flame.
- **Dual flame power burner:** versatile burner for extra-hot and extra-gentle cooking.
- **Dishwasher-suitable pan supports:** Easy, scrub-free cleaning.
- **Removable dials:** effortless cleaning, happier cooking.
- **Easy cleaning:** detachable dials and dishwasher-suitable pan supports make cleaning a breeze.

Optional accessories

- HEZ32WA00 Wireless food thermometer
HEZ9SE040 4 pieces Set

Technical Data

Appliance type: gas hob w integrated controls
 Built-in / Free-standing: Built-in
 Heating type: Gas
 Number of cooking zones: 5
 Required niche size for installation (HxWxD): 45 x 850-850 x 490-500 mm
 Width of the appliance: 915 mm
 Dimensions: 45x915x520 mm
 Dimensions of the packed product (HxWxD): 175x1110x660 mm
 Net weight: 16.3 kg
 Gross weight: 18.8 kg
 Residual heat indicator: Without
 Location of control panel: Front
 Basic surface material: Stainless steel
 Color of surface: Stainless steel
 Length electrical supply cord: 100 cm
 EAN code: 4242005496082
 Gas connection rating: 12500 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz



Series 6, Gas hob, 90 cm, Stainless steel PCR9A5I90

The gas hob with precise flame control and easy cleaning thanks to detachable metallic knobs and dishwasher suitable cast iron pan supports.

Design

- Stainless steel surface
- Cast iron pan supports
- full metal

Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials, front: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

Burners and power

- 5 gas burners:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left front: economy burner up to 1 kW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Center front: wok burner up to 5 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: standard burner up to 1.75 KW (depending on gas type)

Cleaning

- Removable control dials for easy cleaning between knobs.
- Dishwasher suitable pan supports for easy cleaning.

Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar
- Natural gas H 25 mbar (HU)
- Natural gas L 25 mbar (NL)
- Liquid gas G30,31 28-30/37mbar
- Liquid gas G30 37 mbar (PL)
- Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 51.5 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 500)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 12.5 KW

**Series 6, Gas hob, 90 cm, Stainless steel
PCR9A5I90**

Measurements in mm

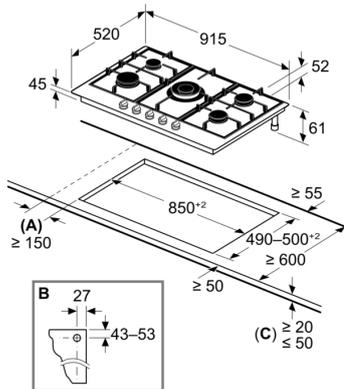


A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details

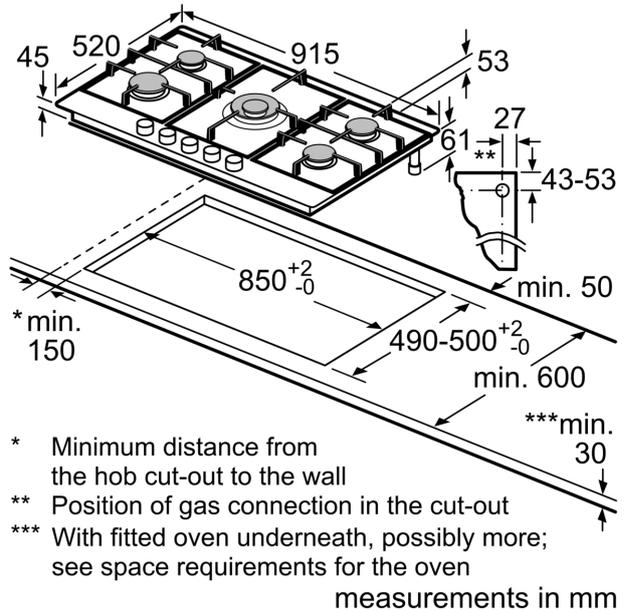

* Minimum distance from the hob cut-out to the wall

** Position of gas connection in the cut-out

*** With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm